



AURORA FIXED SPEED



TURBO MODE



HIGH
DENSITY
FILTERS



AUTO RESTART
FUNCTION

AURORA FIXED SPEED




SPECIFICATIONS

Indoor Model		MSABF-34HRN1-QC2W	
Outdoor Model		MOD30-34HN1-QC2W	
Power supply		Ph-V-Hz	220-240V- 50Hz, 1Ph
Cooling Performance			
Cooling	Capacity	BTU	34000
	Input	W	3120
	Rated current	A	14.5
	EER	W/W	3,19
Heating Performance			
Heating	Capacity	BTU	37000
	Input	W	3080
	Rated current	A	14.3
	COP	W/W	3,52
Indoor Specifications			
Indoor air flow (Hi/Mi/Lo)		m3/h	1370/1200/980
Indoor noise level (Hi/Mi/Lo)		dB(A)	51/47/42
Indoor unit	Dimension (W*D*H)	mm	1260x283x362
	Packing (W*D*H)	mm	1340x380x450
	Net/Gross weight	Kg	21.8/27.6
Outdoor Specifications			
Outdoor noise level		dB(A)	62.1
Outdoor unit	Dimension (W*D*H)	mm	1048x455x810
	Packing (W*D*H)	mm	1090x500x935
	Net/Gross weight	Kg	70/75
Refrigerant Piping			
Refrigerant type		g	R410A/2.65
Refrigerant piping	Liquid side/Gas side	mm(inch)	Φ9.52Φ15.9(3/8"/5/8")
	Max. refrigerant pipe length	m	25
	Max. difference in level	m	10

Indoor Dimensions

Model	W X D x H
MSABF-34HRN1-QC2W	1260x283x362

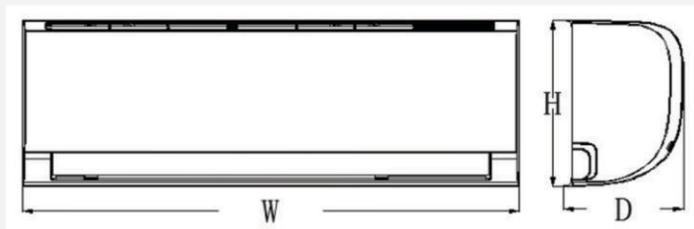

Outdoor Dimensions

Model	W x D x H	A	B
MOD30-34HN1-QC2W	1048x455x810	673	403

